

# HT Chassis®



## 40' Lightweight Gooseneck



Lightweight durable construction with tare weight 5,450 lbs



Extra cargo capacity




Ease of access & repair of 7-way harness and gladhands

### STANDARD FEATURES

- High-strength alloy steel construction for extra strength and durability
- 22.5" radial tires with lightweight aluminum wheels
- LED lights
- All steel parts are shot-blasted and coated with zinc epoxy primer, before fabrication and after welding
- Ease of access & repair of 7-way harness and gladhands
- Sealed wiring harness with integral ground
- Complies with AAR & NHTSA regulations and TTMA recommendations
- 4-3/4" Gooseneck height

Hyundai Translead is the only manufacturer to offer hot-dipped galvanizing of the complete chassis frame and components as an enhanced option to further protect against corrosion

For more information, visit:  
[HyundaiTranslead.com](http://HyundaiTranslead.com)

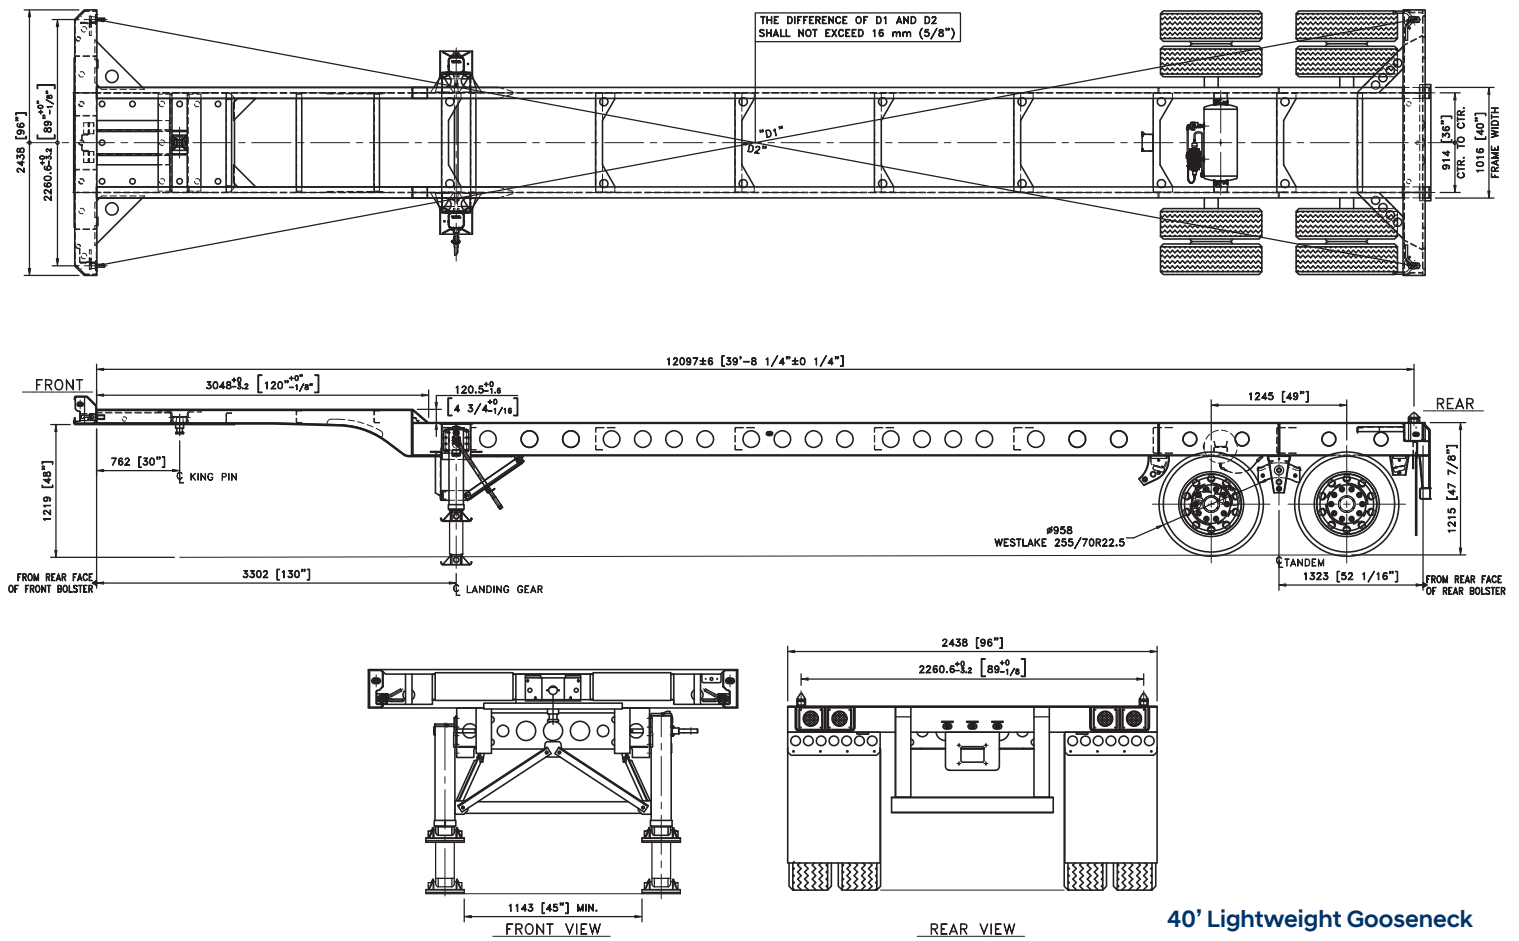

40' Lightweight Gooseneck

### STANDARD SPECIFICATIONS

#### GENERAL

Overall Length	40' 8-1/2"
King Pin Setting	30"
Capacity	65,000 lbs
Tare Weight	5,450 lbs
GVWR	70,400 lbs

#### BODY CONSTRUCTION

Main Beam	High tensile steel, hot rolled 12" x 16 lbs/ft H-beam
Gooseneck	Fabricated "I" Beam with 5/16" top & bottom flanges and 1/4" web, all GR80
Crossmembers	Fabricated channel with gussets integrated
Upper Coupler	All high tensile steel construction with AAR Certified cruciform style king pin. All interior walls of closed sections coated for superior corrosion protection
Front Bolster	8"W x 10"H "U" channel 3/16" thick GR80 with two locking pins
Rear Bolster	8"W x 7-7/8"H "U" channel GR80 with two non-retractable twist locks
Landing Gear	50,000 lbs capacity with heavy-duty low profile sand shoe (solid pin)
Rear Impact Guard	4" horizontal step "U" channel designed and tested to conform to Federal Motor Vehicle Safety Standards (FMVSS)
Suspension	SAF Holland overslung spring hangers with two leaf springs
Wheel & Drums	Heavy duty, 16-1/2" x 7" outboard mounted brake drums with 8-1/4" x 22-1/2" hub piloted aluminum disc wheels
Tires	255/70R22.5 16 PLY (H)
Axles	5" round, 22,500 lbs rating, 71 -1/2" track, 16-1/2" x 7" with non-asbestos brake lining
Brakes	2S-1M ABS brake system. Complies with FMVSS 121
Lights & Wiring	12 volt sealed system with molded connectors to fit sealed LED lamps
Paint	All steel parts shot-blasted, coated with a zinc epoxy primer and finished with urethane topcoat
Markings	Customer and conspicuity markings installed per latest Federal Safety Standards



All dimensions are nominal  
Consult factory for available options  
Specifications subject to change without notice

A subsidiary of Hyundai Motor Company  
800-251-0871 • www.hyundairtranslead.com